

Dawn & Dusk

**Basin Faucet
Installation Manual**

DDM2381Z

Warranty Duration

All parts of this Bathroom Accessories Set are warranted to the original purchaser to be free from defects in material and workmanship for a lifetime.

Repair and Replacement

If the product has defects in material and workmanship within the warranty period, we will repair or replace the product free of charge. However, you may be required to provide the invoice when requesting repairs or replacement from us.

Exclusions

We shall not be responsible for the following cases:

- Damage to the product caused by improper installation, misuse, unauthorized repair or replacement, or abuse (including damage during shipment).
- Damage to the product caused by improper dismantlement after installation.
- Damage resulting from abnormal water pressure and impurities in water pipes is not covered under this warranty.
- Rust on the product due to insufficient care and maintenance is not covered under this warranty.
- Damage caused by natural disasters such as fire, flood, earthquake, electric storms, etc., is not covered under this warranty.

I hope this helps! If you have any further questions or concerns, please let me know.

Having Trouble? Contact us.



DDM2381Z

CONTENT




1. Basin Faucet Installation Manual----- (1-4)

CONTENIDO

1. Manual de instalación del grifo de lavabo ----- (5-8)

Prior to Installation

1. Make sure you have all necessary parts by checking the diagram and parts List.
2. Ensure if your Basin is matching with the Kitchen Faucets size.
3. Do not disassemble the main faucet body, as it has been installed & commissioned correctly & precisely before delivery from the factory.
4. Turn off hot and cold water supplies before beginning.
5. To keep the faucet from jamming, flush the water pipe before installation.
6. When finished installation, check all the joints and connections for leaks.



7. Technical Data:


Normal Working Pressure: 0.3 Mpa

Recommended Allowable Pressure Range: 0.2-0.5 Mpa

Cold Water Supply Temperature: 10-25°C


Hot Water Supply Temperature: 50-65°C

Standard Part List

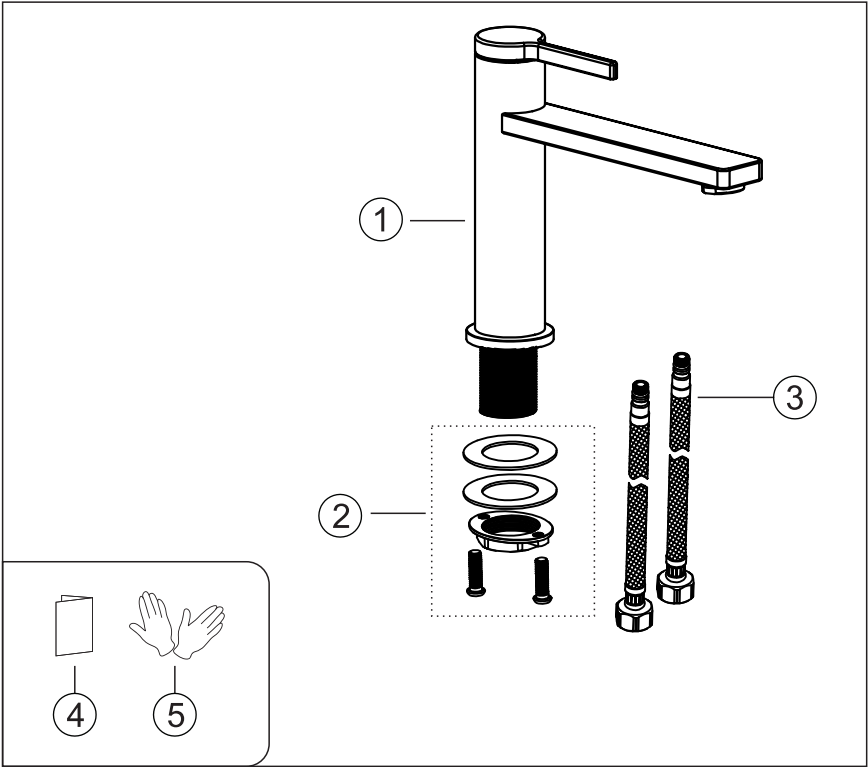


NO.	Part Name	Qty
1	Faucet Body	1
2	Tailpiece Nut Assembly	1 set
3	Hot and Cold Inlet Pipes	1
4	Installation Manual	1
5	Gloves	2

Installation Step

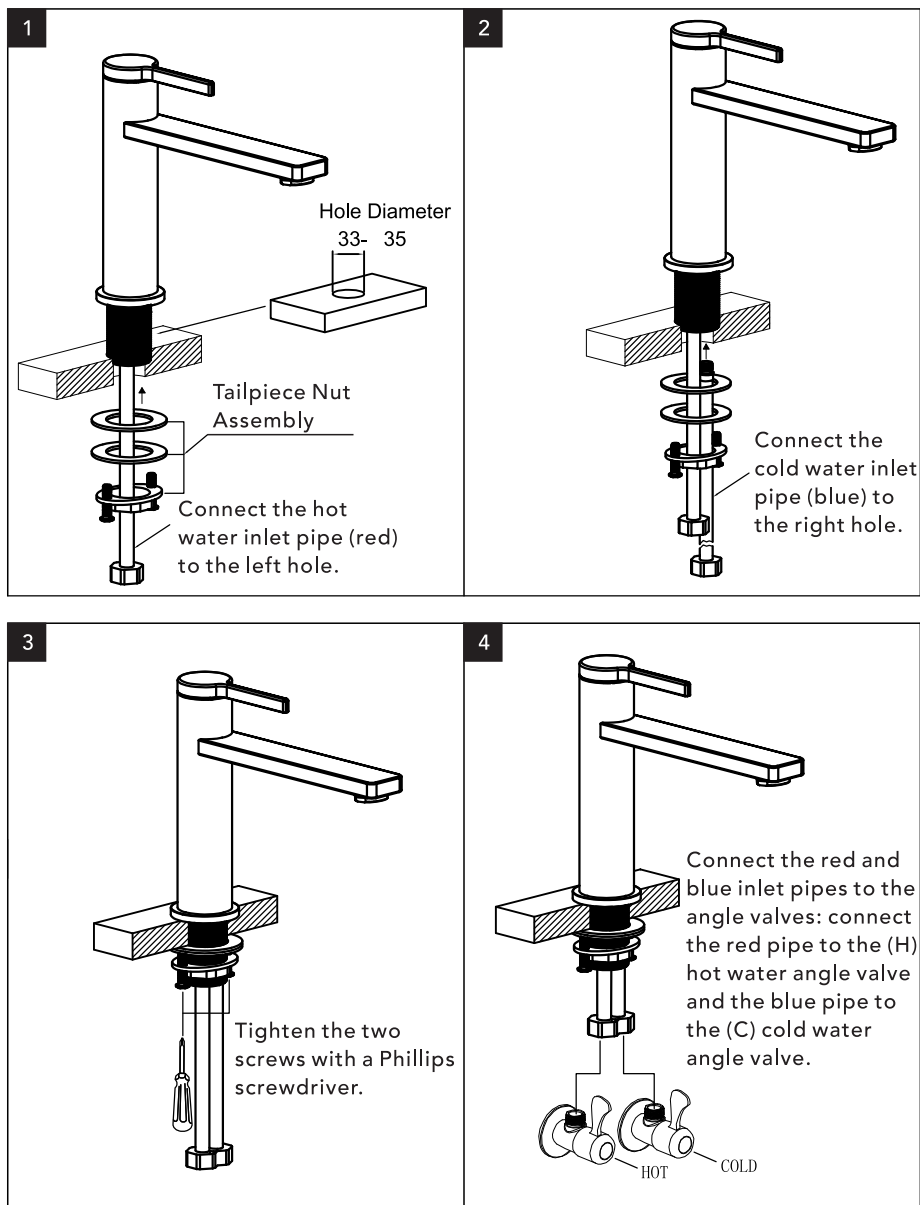

Operating Instructions

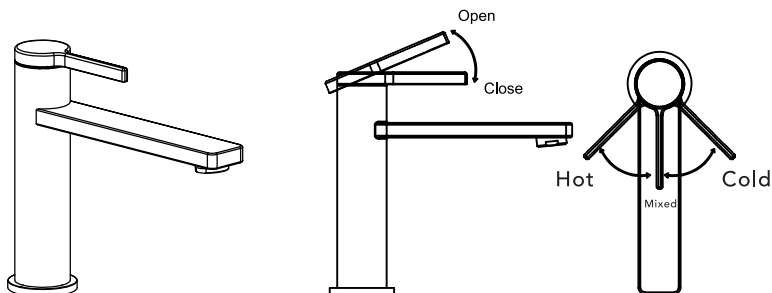

Product Cleaning and Care:



To keep the product shiny and bright, regularly or frequently clean the faucet:

1. Rinse with clean water and dry the faucet with a soft cotton cloth.
2. Do not use detergents containing coarse particles such as scouring powder or polishing powder, nylon brushes, sandcloth, or sandpaper to avoid damaging the product.
3. Do not use any acidic cleaners, abrasive cleaners, or soaps for polishing.
4. If the water flow from the faucet significantly decreases, clean the shower filter screen and the inlet hose filter screen to prevent clogging and bursting of the showerhead. For extensive cleaning tasks, follow these steps:
 - i. Use water and a soft cloth to remove dirt and film from the surface as much as possible.
 - ii. Use the following cleaners to remove surface dirt and film:
 - Mild liquid detergent.
 - Colorless glass cleaner.
 - Non-abrasive, fully dissolvable powdered cleaners (mixed according to the manufacturer's instructions).
 - Non-abrasive polishing liquid.
 - iii. After cleaning, rinse off all cleaning agents with clean water and dry with a soft cloth.

Antes de la instalación

1. Asegúrate de tener todas las piezas necesarias verificando el diagrama y la lista de piezas.

2. Verifica si tu lavabo es compatible con el tamaño de los grifos de la cocina.

3. No desarmes el cuerpo principal del grifo, ya que ha sido instalado y ajustado correctamente en fábrica antes de la entrega.

4. Cierra el suministro de agua caliente y fría antes de comenzar.

5. Para evitar que el grifo se atasque, purga la tubería de agua antes de la instalación.

6. Al terminar la instalación, verifica todas las uniones y conexiones para detectar fugas.




7. Datos técnicos:

Presión de trabajo normal: 0.3 Mpa


Rango de presión permitido recomendado: 0.2-0.5 Mpa

Temperatura del suministro de agua fría: 10-25°C

Temperatura del suministro de agua caliente: 50-65°C




Lista de partes estándar

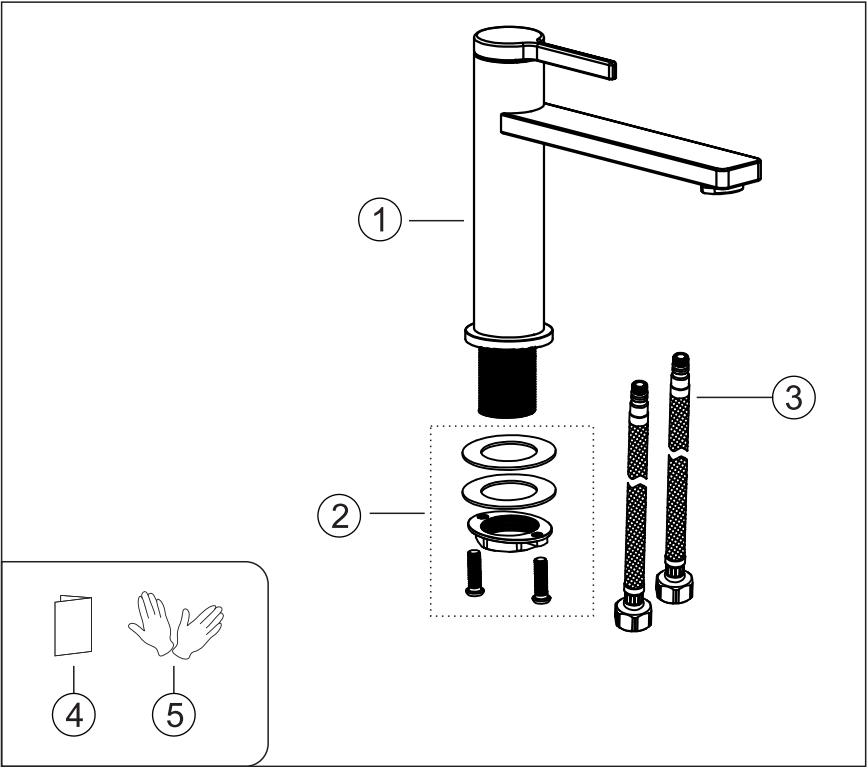


N.º	Nombre de la pieza	Cant.
1	Cuerpo del grifo	1
2	Ensamblaje de tuerca del tubo de cola	1 juego
3	Tuberías de entrada de agua caliente y fría	1
4	Manual de instalación	1
5	Guantes	2

Paso de instalación

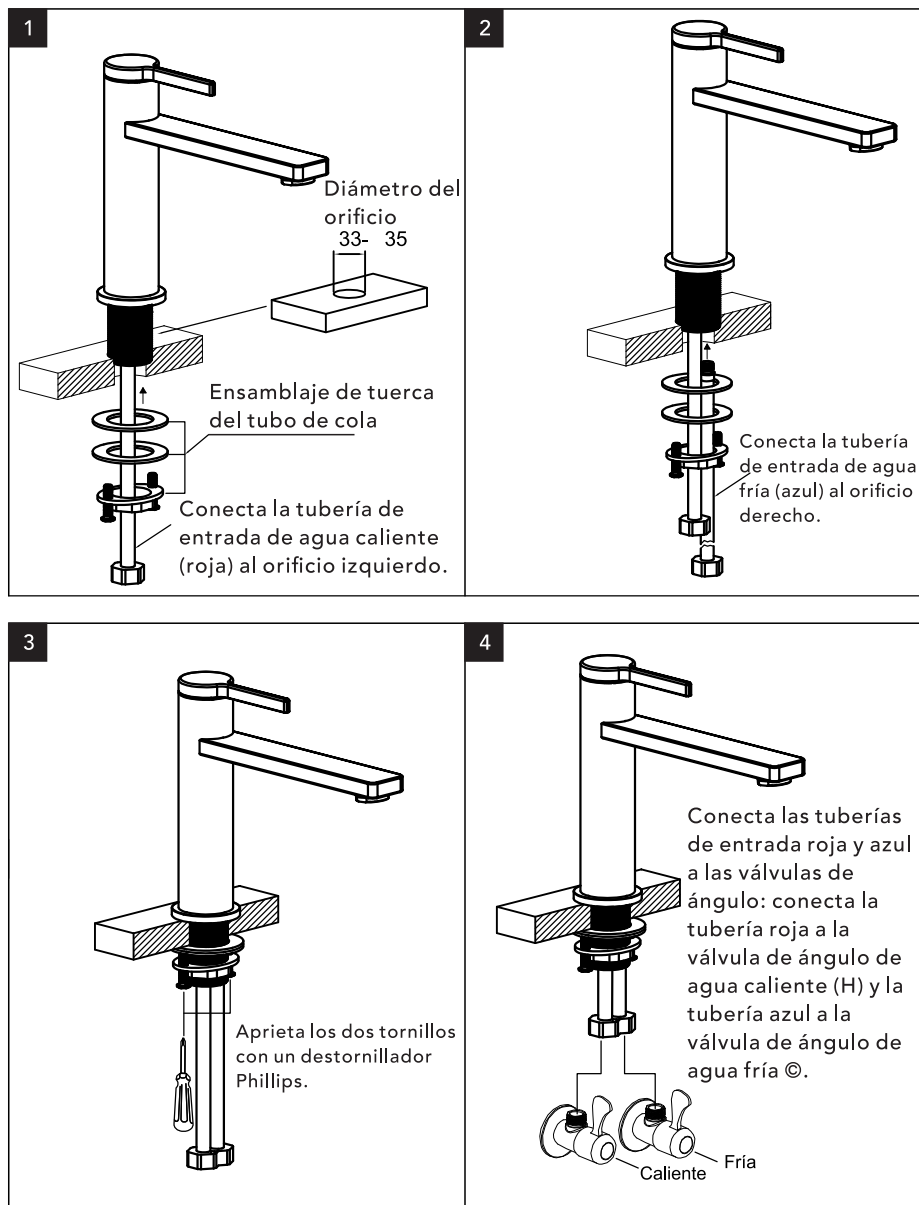

Instrucciones de funcionamiento

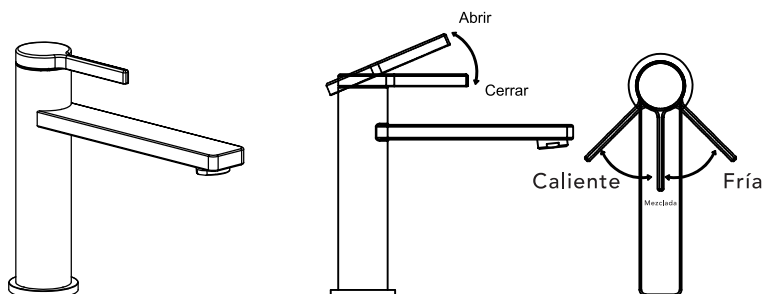

Limpieza y cuidado del producto:



Para mantener el producto brillante y reluciente, limpia el grifo regularmente o con frecuencia:

1. Enjuaga con agua limpia y seca el grifo con un paño de algodón suave.
2. No uses detergentes que contengan partículas gruesas como polvo abrasivo o de pulir, cepillos de nailon, telas de esmeril o papel de lija para evitar dañar el producto.
3. No uses limpiadores ácidos, limpiadores abrasivos ni jabones para pulir.
4. Si el flujo de agua del grifo disminuye significativamente, limpia la malla del filtro de la ducha y la malla del filtro
 - I. Usa agua y un paño suave para quitar la suciedad y la película de la superficie tanto como sea posible.
 - II. Usa los siguientes limpiadores para eliminar la suciedad y la película de la superficie:
 - Detergente líquido suave.
 - Limpiador de vidrios incoloro.
 - Limpiadores en polvo no abrasivos y completamente solubles (mezclados según las instrucciones).
 - Líquido de pulido no abrasivo.
 - iii. Después de limpiar, enjuaga todos los agentes limpiadores con agua limpia y seca con un paño suave.